

STX Series

Passive loudspeaker



STX 812M
Passive Loudspeaker



STX 815M
Passive Loudspeaker



DISCRIPTION 产品描述

L-Solution perfect sand painting STX series loudspeaker includes STX812M,STX815M,STX825, STX818S,STX828S.All of them available to match with each other specially for top rank sound solution, such as nigh club,conference hall, live show,hotel,bar,studium, theatre,etc.STX series loudspeaker will always performance beyond all your high requirements on sound system solution.

The brand new acoustical coupling cabinet design with attractive sand paint, as well as distinguish grille. It will be fantastic to match with all your building decorations.What's more,the audiences will keep in mind for long time when they ever been enjoy such wonderful sound system.

STX series full range loudspeaker due to their small size,is also recommended mandatory an visually non-abstractive sound reinforcement system.They will very well accepted in where great sound quality and little space occupancy are must.

L-Solution頂級沙粒漆STX系列專業箱包含有STX812M, STX815M, STX825, STX818S, STX828S。此系列所有型號可自由搭配組合使用,是頂級音響方案的最佳選擇。其應用場所所有高級夜總會、演藝吧、多功能會議廳、高檔酒店、酒吧、體育館、影劇院、等等。STX系列專業箱長時間持續工作兼以卓越的音效,完全超乎您對它們的期望。

STX系列融合了全新的聲學箱體結構設計,耀眼的沙粒噴漆以及精緻的鉄網,絕對配得上任何高檔豪華的建築裝修。更重要的是,但凡有過欣賞其音色的聽眾都會流連忘返,念念不忘。

SRX系列全頻專業箱得益於它們緊湊輕巧,非常適用在擴音場地小且需要隱藏音箱的設計方案。SRX系列專業箱對於擴音空間環境相對有限的場所應用非常廣泛,用戶反饋非常積極和滿意。

Applications 工程應用

| | | | |
|-------------------|-------|---------------------|------|
| Live Show | 現場演出 | Stadium & Gymnasium | 體育場館 |
| Disco/Bar | 舞廳/酒吧 | Nightclub | 夜總會 |
| Public Square | 露天廣場 | Theater | 影劇院 |
| Church/School | 禮堂/學校 | Hotel | 高級酒店 |
| Conference Centre | 會議中心 | | |

SPECIFICATIONS 产品参数

| Model: | 型號: | STX 812M | STX 815M |
|-----------------------------------|------------|--------------------------------|--------------------------------|
| Components: | 單元構成: | 1×12"+1×1" | 1×15"+1×1.4"(75MM) |
| Frequency Response(±3dB): | 頻率響應: | 75 Hz-20 kHz | 52Hz-20KHz |
| Cover Angle:(Horizonta ×Vertical) | 覆蓋角: | 70°×70°(Horizonta x Vertical) | 70°×70° |
| Max SPL at 1M : | 最大聲壓: | 125dB | 127dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 400W/1200W | 500W/1500W |
| Recommend Amps: | 功放推薦: | 700W 8 ohms | Recommend Amps: 800W 8 ohms |
| System Sensitivity(1w@1m): | 系統靈敏度: | 95dB | 95dB |
| Nominal Impedance: | 阻抗: | 8 ohm | 8 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | NL4*2 +1/-1 | NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 12Kgs/14kgs | 20kgs/22kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 425×335×645mm | 525×425×820mm |

STX SERIES Passive Loudspeaker

www.Isolutionpro.com



STX 825 Passive Loudspeaker

SPECIFICATIONS 产品参数

| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | STX 825M |
| Components: | 單元構成: | 2×15"+1×1.4"(75mm) |
| Frequency Response(±3dB): | 頻率響應: | 42Hz - 19 kHz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | 90°×50° |
| Max SPL at 1M : | 最大聲壓: | 127dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 1000W/3000W |
| Recommend Amps: | 功放推薦: | 1250W 8 ohms |
| System Sensitivity(1w@1m): | 系統靈敏度: | 99dB |
| Nominal Impedance: | 阻抗: | 4ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | Original Neutrik NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 46Kgs/49Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 665×660×1230mm |

STX 818S Passive Subwoofer

SPECIFICATIONS 产品参数



| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | STX 818S |
| Components: | 單元構成: | 1×18" |
| Frequency Response(±3dB): | 頻率響應: | 40Hz-250Hz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | N/A |
| Max SPL at 1M : | 最大聲壓: | 127dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 700W/2100W |
| Recommend Amps: | 功放推薦: | 1250W 8 ohms |
| System Sensitivity(1w@1m): | 系統靈敏度: | 95dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | Original Neutrik NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 43Kgs/45Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 830×680×650mm |

STX 828S Passive Subwoofer

SPECIFICATIONS 产品参数



| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | STX 828S |
| Components: | 單元構成: | 2×18" |
| Frequency Response(±3dB): | 頻率響應: | 38Hz-180Hz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | N/A |
| Max SPL at 1M : | 最大聲壓: | 134dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 1300W/3900W |
| Recommend Amps: | 功放推薦: | 1250W 8 ohms |
| System Sensitivity(1w@1m): | 系統靈敏度: | 99dB |
| Nominal Impedance: | 阻抗: | 4 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | Original Neutrik NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 82Kgs/85Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 1235×660×800mm |

F+ SERIES

Passive loudspeaker



DISCRIPTION 產品描述

L-Solution high rank entertainment F+ series loudspeaker includes F10+, F12+, F15+, F215+, and corresponding S+ series subwoofer S18+, S218+.

The full range F+ series are high fidelity and high output that delivers incredible SPL from such a solid enclosure. Especially, the compression HF driver generates clear and soft vocal even in crowded and noisy environment, while the LF driver offers remarkable deep bass, genius for night club, live show, etc.

Quick and safe fly rigging offers flexibility of both horizontal and vertical setting, with option to fly or ground stack.

S+ subwoofer guarantee bearing super powerful impact forces anytime under such direct delivery, as keeping brilliant, solid and powerful low frequency vividly.

L-Solution 高檔娛樂F+系列專業箱包含有F10+, F12+, F15+, F215+,以及相應的超低S18+, S218+。

F+ 系列全頻專業箱體堅固耐用，以超乎想象的超大輸出聲壓以及高保真度而著稱。特別是精挑細選的高效壓縮驅動器，造就了清晰柔美的人聲。不管多嘈雜，多複雜的環境下都能表現得淋漓盡致。而同時，特定的低音喇叭單元除了足確保有夠的下限外，還能長期持續保持超強低頻和動感。

安全便捷的吊掛設計，靈活多樣。既可水平吊掛，也可以垂直吊掛；可固定安裝，也可流動演出。

Applications 工程應用

| | | | | | | | |
|--------------|-----|---------|-----|---------------|------|-----------|------|
| Meeting Room | 會議室 | School | 學校 | Disco/Bar | 迎廳 | Live Show | 現場演出 |
| Church | 禮堂 | Theater | 影劇院 | Wedding Place | 婚禮場所 | Hotel | 酒店 |

SPECIFICATIONS 產品參數

| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | F 10+ |
| Components: | 單元構成: | 1×10"+1×1" |
| Frequency Response(±3dB): | 頻率響應: | 65 Hz-22 kHz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | 90°×50° |
| Max SPL at 1M : | 最大聲壓: | 123dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 250W/750W |
| Recommend Amps: | 功放推薦: | 8ohm Q1/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 96dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and grey painting |
| Input Connector: | 連接插座: | Original Neutrik NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | N.W / G.W : 12Kgs/14Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 353×500×319mm |



SPECIFICATIONS 產品參數

| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | F 12+ |
| Components: | 單元構成: | 1×12"+2×1" 44mm |
| Frequency Response(±3dB): | 頻率響應: | 75 Hz - 20 kHz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | 80°× 50° |
| Max SPL at 1M : | 最大聲壓: | 125dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 400W/1200W |
| Recommend Amps: | 功放推薦: | 8ohm Q1/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 95dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | Original Neutrik NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 14Kgs/15Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 490×450×700mm |



SPECIFICATIONS 產品參數

| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | F 15+ |
| Components: | 單元構成: | 1×15"+1×1.4"(75mm) |
| Frequency Response(±3dB): | 頻率響應: | 52Hz-20KHz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | 80°× 50° |
| Max SPL at 1M : | 最大聲壓: | 127dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 500W/1500W |
| Recommend Amps: | 功放推薦: | 8ohm Q3/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 95dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | Original Neutrik NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 20kgs/22kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 540×513×765mm |





F 215+ Passive Loudspeaker

SPECIFICATIONS 产品参数

| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | F 215+ |
| Components: | 單元構成: | 2×15'+1×1.4'(75mm) |
| Frequency Response(±3dB): | 頻率響應: | 42Hz-19 kHz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | 90°× 50° |
| Max SPL at 1M : | 最大聲壓: | 127dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 1000W/3000W |
| Recommend Amps: | 功放推薦: | 8ohm Q5/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 99dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | Original Neutrik NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 46Kgs/49Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 635×639×1465mm |

S 18+ Passive Subwoofer

SPECIFICATIONS 产品参数

| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | S 18+ |
| Components: | 單元構成: | 1×18' |
| Frequency Response(±3dB): | 頻率響應: | 40Hz - 250Hz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | N/A |
| Max SPL at 1M : | 最大聲壓: | 127dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 700W/2100W |
| Recommend Amps: | 功放推薦: | 8ohm Q5/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 95dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 43Kgs/45Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 685×650×785mm |



S 218+ Passive Subwoofer

SPECIFICATIONS 产品参数

| | | |
|------------------------------------|------------|--------------------------------|
| Model: | 型號: | S 218+ |
| Components: | 單元構成: | 2×18' |
| Frequency Response(±3dB): | 頻率響應: | 38Hz-180Hz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | N/A |
| Max SPL at 1M : | 最大聲壓: | 134dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 1300W/3900W |
| Recommend Amps: | 功放推薦: | 8ohm Q5/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 99dB |
| Nominal Impedance: | 阻抗: | 4 ohm |
| Box Construction: | 音箱結構: | 18mm plywood and Sand painting |
| Input Connector: | 連接插座: | NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 82Kgs/85Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 870×650×1163mm |



H Series

Passive loudspeaker



H 8 Passive Loudspeaker



H 10 Passive Loudspeaker



DESCRIPTION 產品描述

L-Solution H series loudspeaker includes H8,H10,H12,H15,H215.All of them available to match with each other specially for economical sound solution, such as bar, shop,church,school,factory,hotel etc.H series loudspeaker will flash your mind that amazing sound quality with low cost sound system.

M series full range loudspeaker due to their small size,is also recommended mandatory an visually non-abstractive sound reinforcement system.They will very well accepted in where great sound quality and little space occupancy are must.

L-Solution H 系列專業箱包含有H8, H10, H12, H15, H215。此系列所有型號可自由搭配組合使用,是經濟實用音響方案的最佳選擇。為應用場所有酒吧、商場、禮堂、學校、工廠、酒店、等等。H系列專業箱以卓越的音效,完全可以顛覆你現有對中低端音響系統的成見。H系列力求高性價比,沒有什麼不可以。

M 系列全頻專業箱得益於它們緊湊輕巧,非常適用於在擴聲場地小且需要隱藏音箱的設計方案。H 系列專業箱對於擴聲空間環境相對有限的場所應用非常廣泛,用戶反饋非常積極和滿意。

Applications 工程應用

| | | | |
|-------------------|-------|---------------------|------|
| Live Show | 現場演出 | Stadium & Gymnasium | 體育場館 |
| Disco/Bar | 迪廳/酒吧 | Nightclub | 夜總會 |
| Public Square | 露天廣場 | Theater | 影劇院 |
| Church/School | 禮堂/學校 | Hotel | 高級酒店 |
| Conference Centre | 會議中心 | | |

SPECIFICATIONS 產品參數

| Model: | 型號: | H 8 | H 10 |
|------------------------------------|------------|---------------------------|---------------------------|
| Components: | 單元構成: | 1×8"+1×1.3" | 1×10"+1×1.3"(34mm) |
| Frequency Response(±3dB): | 頻率響應: | 70Hz-20KHz | 70Hz-20KHz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | 90°x 50° | 90°x 50° |
| Max SPL at 1M : | 最大聲壓: | 112dB | 113dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 200W/600W | 250W/750W |
| Recommend Amps: | 功放推薦: | 300W 8 ohms | 400W 8 ohms |
| System Sensitivity(1w@1m): | 系統靈敏度: | 92dB | 93dB |
| Nominal Impedance: | 阻抗: | 8 ohm | 8 ohm |
| Box Construction: | 音箱結構: | 15mm plywood and painting | 15mm plywood and painting |
| Input Connector: | 連接插座: | NL4*2 +1/-1 | NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 14Kgs/15Kgs | 14Kgs/15Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 353×500×319mm | 353×500×319mm |



H 12 Passive Loudspeaker

SPECIFICATIONS 产品参数

| | | |
|-----------------------------------|------------|---------------------------|
| Model: | 型號: | H 12 |
| Components: | 單元構成: | 1×12'+1×1"(44mm) |
| Frequency Response(±3dB): | 頻率響應: | 45Hz-18KHz |
| Cover Angle:(Horizonta ×Vertical) | 覆蓋角: | 90°× 50° |
| Max SPL at 1M : | 最大聲壓: | 119dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 350W/1200W |
| Recommend Amps: | 功放推薦: | 700W 8 ohms |
| System Sensitivity(1w@1m): | 系統靈敏度: | 94dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 15mm plywood and painting |
| Input Connector: | 連接插座: | NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 12Kgs/14Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 439×820×652mm |



H 15 Passive Loudspeaker

SPECIFICATIONS 产品参数

| | | |
|-----------------------------------|------------|---------------------------|
| Model: | 型號: | H 15 |
| Components: | 單元構成: | 1×15'(75mm) +1×1"(75mm) |
| Frequency Response(±3dB): | 頻率響應: | 52Hz-20KHz |
| Cover Angle:(Horizonta ×Vertical) | 覆蓋角: | 90°× 50° |
| Max SPL at 1M : | 最大聲壓: | 120dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 500W/1500W |
| Recommend Amps: | 功放推薦: | 800W 8 ohms |
| System Sensitivity(1w@1m): | 系統靈敏度: | 96dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 15mm plywood and painting |
| Input Connector: | 連接插座: | NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 30Kgs/32Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 501×790×494mm |



H 215 Passive Loudspeaker

SPECIFICATIONS 产品参数

| | | |
|-----------------------------------|------------|---------------------------|
| Model: | 型號: | H 215 |
| Components: | 單元構成: | 2×15' 75mm |
| Frequency Response(±3dB): | 頻率響應: | 45Hz-18KHz |
| Cover Angle:(Horizonta ×Vertical) | 覆蓋角: | 90°× 50° |
| Max SPL at 1M : | 最大聲壓: | 123dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 800W/2400W |
| Recommend Amps: | 功放推薦: | 800W 8 ohms |
| System Sensitivity(1w@1m): | 系統靈敏度: | 99dB |
| Nominal Impedance: | 阻抗: | 4 ohm |
| Box Construction: | 音箱結構: | 15mm plywood and painting |
| Input Connector: | 連接插座: | NL4*2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 75Kgs/77Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 635×639×1465mm |

CR SERIES

Conference speaker 多功能箱



Conference speaker

DISCRIPTION 產品描述

CR Series include 4 models CR6, CR8, CR10, CR12. Because of special design for box and sound, all of models has clear vocal, good mid range, even play wonderful in KTV room. There are widely used for back ground music, conference hall and even the KTV room. According your request, all speaker can be made in black, brown and white color.

CR系列音箱包含4款分別是CR6, CR8, CR10和CR12。獨特的箱體結構設計以及優質的喇叭選擇，CR系列不僅廣泛應用於會議，背景音樂，更是KTV房的優質選擇。人聲清晰，通透，入麥強。無論在K房還是會議系統都能讓你輕鬆駕馭。

Applications

| | | | |
|--------------|--------|-------------------|------|
| Applications | 多媒體室 | Public Square | 公共廣場 |
| KTV | KTV | Hotel | 酒店 |
| Nightclub | 夜總會 | Church/School | 教會學校 |
| Disco/Bar | 迪斯科/酒吧 | Conference Centre | 會議中心 |
| Theater | 劇院 | | |

CR 6 Conference speaker

SPECIFICATIONS 產品參數



| | | |
|------------------------------------|------------|------------------------------|
| Model: | 型號: | CR 6 |
| Components: | 單元構成: | 1×6.5"+1×25mm" |
| Frequency Response(±3dB): | 頻率響應: | 69Hz-20kHz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | 80°×50° |
| Max SPL at 1M : | 最大聲壓: | 112dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 160W/600W |
| Recommend Amps: | 功放推薦: | 8ohm Q1/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 97dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 18mm Plywood and Oil Paint |
| Input Connector: | 連接插座: | Original Neutrik NL4×2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 9Kgs/9.5Kgs |
| Shipping Dimensions(W×H×D): | 包裝尺寸: | 290×405×328mm |



CR 8 Conference speaker

SPECIFICATIONS 产品参数

| | | |
|-----------------------------------|------------|------------------------------|
| Model: | 型號: | CR 8 |
| Components: | 單元構成: | 1×8"+1×36mm" |
| Frequency Response(±3dB): | 頻率響應: | 50Hz-20kHz |
| Cover Angle:(Horizonta ×Vertical) | 覆蓋角: | 80°×50° |
| Max SPL at 1M : | 最大聲壓: | 119dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 200W/600W |
| Recommend Amps: | 功放推薦: | 8ohm Q1/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 99dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 18mm Plywood and Oil Paint |
| Input Connector: | 連接插座: | Original Neutrik NL4×2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 11Kgs/12Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 345×495×335mm |

CR 10 Conference speaker

SPECIFICATIONS 产品参数


| | | |
|-----------------------------------|------------|------------------------------|
| Model: | 型號: | CR 10 |
| Components: | 單元構成: | 1×10"+1×1"(34mm) |
| Frequency Response(±3dB): | 頻率響應: | 90Hz-20kHz |
| Cover Angle:(Horizonta ×Vertical) | 覆蓋角: | 80°×50° |
| Max SPL at 1M : | 最大聲壓: | 118dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 250W/900W |
| Recommend Amps: | 功放推薦: | 8ohm Q1/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 95dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 15mm plywood and Oil Paint |
| Input Connector: | 連接插座: | Original Neutrik NL4×2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 17Kgs/17.6Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 417×388×585mm |



CR 12 Conference speaker

SPECIFICATIONS 产品参数

| | | |
|-----------------------------------|------------|------------------------------|
| Model: | 型號: | CR 12 |
| Components: | 單元構成: | 1×12"+1×1"(44mm) |
| Frequency Response(±3dB): | 頻率響應: | 90Hz-20kHz |
| Cover Angle:(Horizonta ×Vertical) | 覆蓋角: | 80°×50° |
| Max SPL at 1M : | 最大聲壓: | 120dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 350W/1050W |
| Recommend Amps: | 功放推薦: | 8ohm Q1/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 95dB |
| Nominal Impedance: | 阻抗: | 8 ohm |
| Box Construction: | 音箱結構: | 15mm plywood and Oil Paint |
| Input Connector: | 連接插座: | Original Neutrik NL4×2 +1/-1 |
| N.W / G.W : | 淨重/毛重: | 19.5Kgs/21Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 456×420×675mm |

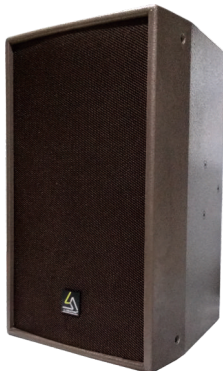

K Series

KTV speaker



KT 10 KTV speaker



KT 12 KTV speaker



DISCRIPTION 產品描述

KT karaoke series has 4 models which is specially for different size of KTV rooms. KT10&KT10II are designed for small ktv room. Because of the clear sound, high sensitivity and good vocal can help you sing any different songs. KT10 pro,KT12 is designed for the big ktv room. Especially the crossover and phase design, you will feel very good stereo effect when you sing.

KT系列是專門為卡拉OK包房設計的四款不同大小的音箱。KT10（10”一低兩高）&KT10II（10”一低四高）是專門為小包房設計，音色飽滿，人聲通透，靈敏度高讓您輕鬆駕馭不同風格的音樂。KT10pro,KT12是大包房PA箱，非常精準的相位設計，聲音環繞感極佳。音質細膩，聲壓大，人聲通透，容易入麥。

Applications 工程應用

| | | | |
|-------------------|--------|-----------------|------|
| KTV Room | KTV 包房 | Shopping centre | 購物中心 |
| School | 學校 | Church | 禮堂 |
| Hotel | 賓館 | Workshop | 工廠 |
| Conference centre | 會議中心 | | |

SPECIFICATIONS 產品參數

| Model: | 型號: | KT 10 | KT 12 |
|------------------------------------|------------|---|---|
| Components: | 單元構成: | 1×10"+1x1"(44mm) | 1×12"+1x1"(44mm) |
| Frequency Response(±3dB): | 頻率響應: | 90Hz-20kHz | 90Hz-20kHz |
| Cover Angle:(Horizontal ×Vertical) | 覆蓋角: | 80°×50° | N/A |
| Max SPL at 1M : | 最大聲壓: | 118dB | 120dB |
| Power Continuous/peak: | 持續功率/峰值功率: | 250W/900W | 350W/1050W |
| Recommend Amps: | 功放推薦: | 8ohm Q1/T413 | 8ohm Q1/T413 |
| System Sensitivity(1w@1m): | 系統靈敏度: | 95dB | 95dB |
| Nominal Impedance: | 阻抗: | 8 ohm | 8 ohm |
| Box Construction: | 音箱結構: | 18mm Plywood and Black Environmental protection Paint (黑色/棕色) | 18mm Plywood and Black Environmental protection Paint (黑色/棕色) |
| Input Connector: | 連接插座: | NL4*2 +1/-1 | 2x binding post |
| N.W / G.W : | 淨重/毛重: | 17Kgs/17.6Kgs | 23Kgs/25Kgs |
| Shipping Dimensions(WxHxD): | 包裝尺寸: | 417×388×585mm | 630×430×388mm |