


X 10 | M 6D


Coxial Monitor 同軸監聽箱



X 10
Passive Column Speaker

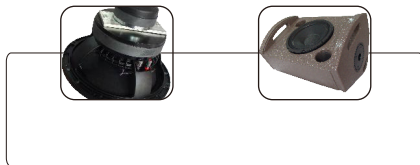

M 6D
Passive Column Speaker

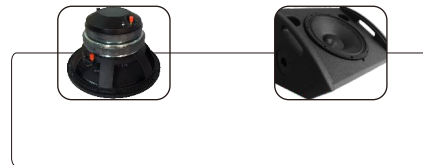

DISCRIPTION 產品描述

X10 belongs to coaxial monitor which consist of 1x10" LF and 1x1.36" HF. Because of it's smart design, high SPL ,clear vocal and special top hat design, it's widely used as monitor and also can be flying via one U bracket to use as conference speaker , background speaker too...

X10是由一只10寸低音和一只1.36寸高音喇叭構成的同軸監聽箱。非常緊湊的聲學箱體設計使得升壓更大，人聲更加清晰。兩端的可吊掛底座，可以通過普通U型架來實現吊掛，因此被廣泛用于補聲、背景音樂、會議音箱等等不同的安裝工程。

DISCRIPTION 產品描述

M6D consist of 1x12" LF and 1x1.76" HF. Smart design, high SPL ,clear vocal, so it's the best choice as one stage monitor. There are three special flying rigging point, so it's widely used as conference speaker , background speaker or other installation too...

M6D 是由一只12寸低音和1.76寸高音構成同軸舞臺監聽箱。非常緊湊的聲學箱體設計使得其具有更大的升壓，更加細膩清晰的人聲。多點可吊掛點設計，可以通過簡單的小吊環來實現吊掛，因此也被廣泛應用於補聲、背景音樂、會議音箱等等不同的安裝工程。

Applications 工程應用

Live Show 現場演出 Public Square 露天廣場 Conference Centre 會議中心 Concert 演唱會
School 學校 Church 教堂 Company Event 公司年會,活動 Hotel 高級酒店

SPECIFICATIONS 產品參數

Model:	型號:	X 10	M 6D
Components:	單元構成:	1×10"+1×1.36" Coaxial Driver	1×12"+1×1.76" Coaxial Driver
Frequency Response(±3dB):	頻率響應:	56 Hz-20 kHz	65Hz-17KHz
Cover Angle:(Horizontal ×Vertical)	覆蓋角:	60°x 90°	50°x 80°
Max SPL at 1M :	最大聲壓:	134dB	132dB
Power Continuous/peak:	持續功率/峰值功率:	280W/840W	350W/1050W
Recommend Amps:	功放推薦:	Q1	Q3
System Sensitivity(1w@1m):	系統靈敏度:	105dB	105dB
Nominal Impedance:	阻抗:	8ohm	8 ohm
Box Construction:	音箱結構:	18mm Birch Plywood and Brown Environmental protection Paint (樺木板, 環保漆)	18mm Birch Plywood and Brown Environmental protection Paint (樺木板, 環保漆)
Input Connector:	連接插座:	Original Neutrik NL4*2 +1/-1	Original Neutrik NL4*2 +1/-1
N.W / G.W :	淨重/毛重:	13kgs/14kgs	13kgs/14kgs
Shipping Dimensions(WxHxD):	包裝尺寸:	430×420×575mm	520X372X580mm

PS 15 | M 4D Monitor Speaker

www.Isolutionpro.com


監聽箱



PS 15
MONITOR SPEAKER



M 4D
MONITOR SPEAKER

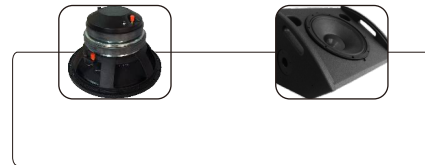

DISCRIPTION 產品描述

Ps15 consists of 1x15"(75mm voice coil) and 1x1.4(75mm voice coil) speaker driver. High SPL, highsensitivity, wide sound& vocal range, sweet music and clearvocal, So PS15 can provide good performance for you, likemonitor, installs or use as line array only you choosesuitable rigging system. it's must be choose for you.

Ps15 由一只15寸低音和3寸高音喇叭構成。高低音均採用3"音圈，具有靈敏度高。音域寬，中高音頻通透，人聲清晰等特點。使得PS15不僅能當監聽箱使用還具有更好的演監性能。可以單只吊掛還可以配合吊掛件當綫陣使用。是一款多功能型的PA陳音箱。

Applications 工程應用

Live show	現場演出	Public Square	露天廣場
Concert	演唱會	Company Event	公司年會，活動
Conference centre	會議中心	Church	教堂
Hotel	酒店	School	學校

DISCRIPTION 產品描述

M4D consist of 1x15" LF and 1x1.76" HF. Smart design, high SPL,clear vocal, so it's the best choice as one stage monitor. There are three special flying rigging point, so it's widely used as conference speaker, background speaker or other installation too...

M4D 是由一只15寸低音和1.76寸高音構成同軸舞臺監聽箱。非常緊湊的聲學箱體設計使得其具有更大的升壓，更加細膩清晰的人聲。多點可吊掛點設計，可以通過簡單的小吊環來實現吊掛，因此也被廣泛應用於補聲、背景音樂、會議音箱等等不同的安裝工程。

SPECIFICATIONS 產品參數

Model:	型號:	PS 15	M 4D
Components:	單元構成:	1×15"+1×1.4"	1X15"+ 1X1.76 Coxial Driver
Frequency Response(±3dB):	頻率響應:	50 Hz-20 kHz	50 Hz-20 kHz
Cover Angle:(Horizonta ×Vertical)	覆蓋角:	60°×55°	60°×55°
Max SPL at 1M :	最大聲壓:	136dB	134dB
Power Continuous/peak:	持續功率/峰值功率:	500W/850W	500W
Recommend Amps:	功放推薦:	Q3/T413 8ohm	Q3/T413 8ohm
System Sensitivity(1w@1m):	系統靈敏度:	105dB	105dB
Nominal Impedance:	阻抗:	8ohm	8ohm
Box Construction:	音箱結構:	18mm Plywood and Black Oil Paint (夾板 油性漆)	18mm Plywood and Black Oil Paint (夾板 油性漆)
Input Connector:	連接插座:	Original Neutrik NL4*2 +1/-1	Original Neutrik NL4*2 +1/-1
N.W / G.W :	淨重/毛重:	35kgs/40kgs	35kgs/40kgs
Shipping Dimensions(WxHxD):	包裝尺寸:	675×434×368mm	675×434×368mm